





AX417T



AX500



AX456



AX411



AX403T



AX453



AX457



AX412

## AMEREX FIRE EXTINGUISHERS

**Amerex's ABC DRY CHEMICAL FIRE EXTINGUISHERS** utilize a monoammonium phosphate dry chemical. It chemically insulates Class A fires by melting and clinging to the heated surface, smothers and breaks the chain reaction on Class B fires and is a non-conductor of electricity. Units are available in a range of sizes from 2½ to 20 lb capacity.

P/N	SHIP.	UNIT	UNIT	SHELL	HEAVY-DUTY
	WEIGHT	HEIGHT	WIDTH	DIAMETER	BRACKET P/N
AX417T	5½ lb	14¾"	5¼"	3"	—
AX500	9¼ lb	15¼"	7¼"	4¼"	5DC
AX500T	9½ lb	15¼"	7¼"	4¼"	5DC
AX424	10½ lb	15½"	8"	4¼"	5DC
AX402	9 lb	15¼"	7¼"	4¼"	5DC
AX402T	9½ lb	15¼"	7¼"	4¼"	5DC
AX456	18 lb	20"	7¾"	5"	5HB
AX441	19 lb	20½"	8¾"	5"	5HB
AX419	19½ lb	17¾"	9½"	6"	10HB
AX411	38 lb	23¼"	10¼"	7"	15HB
AX423	39 lb	24"	10¼"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX417T	2½ lb w/ Vehicle Bracket	1A:10B:C
AX500	5 lb w/ Wall Hanger	2A:10B:C
AX500T	5 lb w/ Vehicle Bracket	2A:10B:C
AX424	5 lb w/ Brass Valve and Wall Hanger	2A:10B:C
AX402	5 lb w/ Wall Hanger	3A:40B:C
AX402T	5 lb w/ Vehicle Bracket	3A:40B:C
AX456	10 lb w/ Wall Hanger	4A:80B:C
→ AX441	10 lb w/ Brass Valve and Wall Hanger	4A:80B:C
AX419	10 lb w/ Brass Valve and Wall Hanger	4A:80B:C
AX411	20 lb w/ Wall Hanger	20A:120B:C
AX423	20 lb w/ Brass Valve and Wall Hanger	20A:120B:C

→ **More ABC DRY CHEMICAL FIRE EXTINGUISHERS Available - Call for Pricing.**

## Amerex's BC DRY CHEMICAL FIRE EXTINGUISHERS

contain a siliconized sodium bicarbonate based dry chemical. Suitable for combating flammable liquid and pressurized gas fires, these extinguishers are electrically non-conductive. Chemical by nature, will not bake to hot surfaces, allowing for easy clean-up. These units are available in a range of sizes from 2½ to 20 lb capacity.

P/N	SHIP.	UNIT	UNIT	SHELL	HEAVY-DUTY
	WEIGHT	HEIGHT	WIDTH	DIAMETER	BRACKET P/N
AX403T	5½ lb	14¾"	5¼"	3"	—
AX453	9½ lb	15¼"	7¼"	4¼"	5DC
AX457	18 lb	20"	7¾"	5"	5HB
AX412	38 lb	23¼"	10¼"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX403T	2½ lb w/ Vehicle Bracket	10B:C
AX453	5½ lb w/ Wall Hanger	40B:C
AX457	10 lb w/ Wall Hanger	60B:C
AX412	20 lb w/ Wall Hanger	120B:C

→ **More BC DRY CHEMICAL FIRE EXTINGUISHERS Available - Call for Pricing.**

In addition to the extinguishers featured here, we're able to special order **Amerex** "HIGH PERFORMANCE" extinguishers, as listed by UL and the USCG. Only **Amerex** has earned the "HIGH PERFORMANCE" listing for stored pressure dry chemical extinguishers in ABC, BC and PK. These units all feature long-range, fast-flow discharge. Call the for pricing on the full line of **Amerex** products!

**Amerex's CHROME ABC & BC DRY CHEMICAL FIRE EXTINGUISHERS** are chrome plated steel cylinders with the highest UL ratings per size. Units are attractive and easy to maintain. Equipped with either a vehicle or vehicle/marine bracket. May be used in the home, office, autos, recreational and off-road vehicles. USCG approved, except for model AX620TC. Chrome Halotron is also available on a special order basis! Call the Sales Department for specifications.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX620TC	2 1/2 lb	10"	3 1/2"	2 3/4"	—
AX417TC	5 1/2 lb	14 3/4"	5 3/4"	3"	—
AX500TC	9 3/4 lb	15 1/4"	7 1/4"	4 1/4"	5DC

P/N	DESCRIPTION	UL RATING
AX620TC	1 lb BC Chrome w/ Vehicle Bracket	2B:C
AX417TC	2 1/2 lb ABC Chrome w/ Vehicle/Marine Bracket	1A:10B:C
AX500TC	5 lb ABC Chrome w/ Vehicle/Marine Bracket	2A:10B:C


→ **More CHROME ABC & BC DRY CHEMICAL FIRE EXTINGUISHERS Available - Call for Pricing.**

**Amerex's HALOTRON I FIRE EXTINGUISHERS** contain a "clean agent" hydrochlorofluorocarbon, discharged as a rapidly evaporating liquid, leaving no residue. Effectively extinguishes Class A and B fires by cooling and smothering them. Will not conduct electricity back to the operator. Halotron is pressurized with Argon gas and is an EPA approved HCFC blend agent, approved on Class A, B and C fires. Has a low GWP of 0.04 – 0.24, low ODP of 0.014 (twelve times lower than the EPA maximum allowable ODP of 0.20) and low Atmospheric Lifetime (3 1/2 to 11 years). Halotron is intended for use in areas formerly protected by Halon 1211 hand portable extinguishers; computer rooms, telecommunications facilities, clean rooms, data storage areas, offices (for protection of sensitive electronic equipment), boats and vehicles.

NOTE: The 5, 11 and 15 1/2 lb are USCG approved with bracket listed on the UL label.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
AX384T	3 1/2 lb	10"	3 1/2"	2 7/8"
AX385TS	5 1/2 lb	14 3/4"	5 1/2"	3"
AX386T	9 lb	15 1/4"	5 3/4"	4 1/4"
AX397	22 1/2 lb	20 1/2"	9 1/4"	6 1/4"
AX398	27 1/2 lb	20 1/2"	9 1/4"	6 1/4"
DDPAX890	57 lb	28 7/8"	7"	7"
DDPAX891	138 lb	37 3/8"	9"	9"
DDPAX892	258 lb	39 3/4"	14"	14"

P/N	DESCRIPTION	UL RATING
AX384T	1 3/8 lb w/ Vehicle Bracket	1B:C
AX385TS	2 1/2 lb w/ Vehicle Bracket	2B:C
AX386T	5 lb w/ Vehicle Bracket	5B:C
AX397	11 lb w/ Wall Hanger	1A:10B:C
AX398	15 1/2 lb w/ Wall Hanger	2A:10B:C
DDPAX890	35 lb Bulk Halotron Cylinder	
DDPAX891	80 lb Bulk Halotron Cylinder	
DDPAX892	200 lb Bulk Halotron Cylinder	

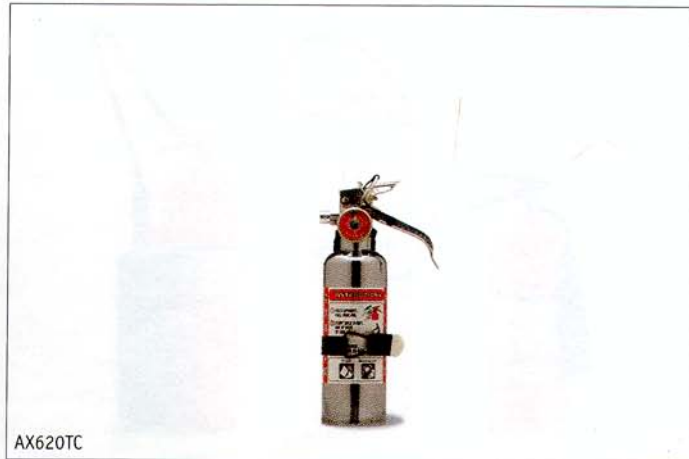

AX620TC



AX500TC



AX384T



AX385TS



AX386T



AX397



AX398



AX322



AX331

**Amerex's CARBON DIOXIDE (CO<sub>2</sub>) PORTABLE FIRE EXTINGUISHERS** effectively fight Class B flammable liquid fires. Electrically non-conductive, with a clean, non-contaminating, odorless gas. Safe for use on clothing, equipment, valuable documents and food.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX322	14 lb	17 <sup>1</sup> / <sub>4</sub> "	8 <sup>1</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
AX330	28 <sup>1</sup> / <sub>2</sub> lb	24"	12"	7"	15HB
AX331	38 lb	30"	12"	7"	15HB
AX332	51 lb	30"	13"	8"	20HB

P/N	DESCRIPTION	UL RATING
AX322	5 lb w/ Wall Hanger	5B:C
AX330	10 lb w/ Wall Hanger	10B:C
AX331	15 lb w/ Wall Hanger	10B:C
AX332	20 lb w/ Wall Hanger	10B:C



AX570

### Amerex's CLASS D DRY POWDER FIRE EXTINGUISHERS

are designed for use on combustible metal fires. Fitted with a "soft-flow" extension applicator to keep operator away from extreme heat and toxic fumes caused by burning material. The applicator can be quickly removed (to provide a straight stream of chemical) when greater range, a narrow discharge pattern or a lobbing effect is required. Comes with a special corrosion resistant yellow (Class D), color-coded paint finish. FM approved.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX570	55 lb	27 <sup>3</sup> / <sub>4</sub> "	16"	7"	15HB
DDPAX571	55 lb	27 <sup>3</sup> / <sub>4</sub> "	16"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX570	30 lb Sodium Chloride w/ Wall Hanger	5B:C
DDPAX571	30 lb Copper w/ Wall Hanger	10B:C



AX260

### Amerex's Class K "Kitchen Use" WET CHEMICAL EXTINGUISHERS

contain a special potassium acetate based, low PH agent, developed for use with pre-engineered restaurant kitchen systems (included in the NFPA 10 1998 edition). The recent trend to more efficient cooking appliances and use of unsaturated cooking oils dictates the use of a hand portable fire extinguisher, with greater fire fighting capacity and cooling effect. Unit comes complete with charge.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
AX260	17 <sup>1</sup> / <sub>2</sub> lb	19"	9"	7"

P/N	DESCRIPTION	UL RATING
AX260	6 liter w/ Wall Hanger	2A:K
AX5302	Recharge for AX260	

P/N	DESCRIPTION	L X H
BL189	K-Class "Fire Extinguisher"	8" x 12"



AX240

### Amerex's STORED PRESSURE WATER FIRE EXTINGUISHER

for use on Class A fires.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX240	7 <sup>1</sup> / <sub>2</sub> lb	24 <sup>1</sup> / <sub>2</sub> "	9"	7"	15HB
AX252	11 lb	24 <sup>1</sup> / <sub>2</sub> "	9"	7"	15HB
AX254	8 lb	19"	8"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX240	2 <sup>1</sup> / <sub>2</sub> gal w/ Wall Hanger	2A
502A	Model 502, 8 <sup>1</sup> / <sub>2</sub> oz, 3% AFFF Premix Charge5	
AX506	Anti-Freeze Charge	
AX252	2 <sup>1</sup> / <sub>2</sub> gal FFFP w/ Wall Hanger	3A:20B
504A	Model 504, 1.14 liter FFFP Premix Charge	
AX254	6 liter AFFF w/ Wall Hanger	2A:10B

**Amerex's STORED PRESSURE DEIONIZED WATER MIST FIRE EXTINGUISHER** is UL listed for Class C applications involving energized electrical equipment. Extinguisher comes empty. Charge sold separately.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
AX272	9 lb	28"	14"	7"	15HB

P/N	DESCRIPTION	UL RATING
AX272	2½ gal w/ Wall Hanger	2A:C
→ AX6712	2½ gal Deionized Water Charge, Pkg/2	



AX272

**Amerex's DIRECT PRESSURE WHEELED FIRE EXTINGUISHERS** utilize a 23 cubic ft nitrogen cylinder on 125 lb and 150 lb units and a 55 cubic ft nitrogen cylinder on 300 lb and 350 lb units, with a "quick opening valve" to pressurize and completely discharge the agent cylinder. The 125 lb and 150 lb units have 16" semi-pneumatic tires. The 300 lb and 350 lb units have 36"D x 6"W steel wheels. Both allow for easy maneuvering and operation by one person. All units fitted with a 4" stainless steel fill opening and brass cap for easy servicing. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX450	335 lb	45"	24"	36"
DDPAX451	360 lb	45"	24"	36"
DDPAX452	335 lb	45"	24"	36"
DDPAX491	743 lb	57"	34"	39"
DDPAX492	793 lb	57"	34"	39"
DDPAX493	743 lb	57"	34"	39"

P/N	DESCRIPTION	UL RATING
DDPAX450	125 lb Direct Pressure ABC	40A:240B:C
DDPAX451	150 lb Direct Pressure BC	240B:C
DDPAX452	125 lb Direct Pressure PK	320B:C
DDPAX491	300 lb Direct Pressure ABC	40A:320B:C
DDPAX492	350 lb Direct Pressure BC	320B:C
DDPAX493	300 lb Direct Pressure PK	320B:C



DDPAX450



DDPAX491

**Amerex's REGULATED PRESSURE WHEELED FIRE EXTINGUISHERS** feature a 110 cubic ft nitrogen cylinder, with a pressure regulator and 16" semi-pneumatic rubber tire. This traditional design allows for adequate pressure to ensure a smooth, complete discharge of the dry chemical, with pressure reserve for blowing down the discharge hose. Easy to transport and operate by one person. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX467	404 lb	52"	26"	38"
DDPAX468	429 lb	52"	26"	38"
DDPAX469	404 lb	52"	26"	38"

P/N	DESCRIPTION	UL RATING
DDPAX467	125 lb Regulated Pressure ABC	40A:240B:C
DDPAX468	150 lb Regulated Pressure BC	240B:C
DDPAX469	125 lb Regulated Pressure PK	320B:C



DDPAX467



DDPAX470

**Amerex's REGULATED PRESSURE WHEELED FIRE EXTINGUISHERS** feature a 110 cubic ft nitrogen cylinder, with a pressure regulator and 36"D x 2 1/2"W steel wheels. This traditional design allows for adequate pressure to ensure a smooth, complete discharge of the dry chemical, with pressure reserve for blowing down the discharge hose. Easy to transport and operate by one person. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX470	432 lb	52"	28"	45"
DDPAX471	457 lb	52"	28"	45"
DDPAX472	432 lb	52"	28"	45"

P/N	DESCRIPTION	UL RATING
DDPAX470	125 lb Regulated Pressure ABC	40A:240B:C
DDPAX471	150 lb Regulated Pressure BC	240B:C
DDPAX472	125 lb Regulated Pressure PK	320B:C



DDPAX495



DDPAX488

**Amerex's STORED PRESSURE WHEELED FIRE EXTINGUISHERS** feature cage-type protection for the agent cylinder and a balanced platform for transportation and operation. The narrow width and semi-pneumatic rubber tires allow for one-person operation in confined areas. Chemical and pressure is sealed in the agent cylinder, ready yet protected. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX495	174 lb	46"	21 1/2"	24"
DDPAX496	174 lb	46"	21 1/2"	24"
DDPAX497	174 lb	46"	21 1/2"	24"
DDPAX488	344 lb	53 1/2"	28"	40"
DDPAX489	369 lb	53 1/2"	28"	40"
DDPAX490	344 lb	53 1/2"	28"	40"

P/N	DESCRIPTION	UL RATING
DDPAX495	50 lb Stored Pressure ABC	30A:160B:C
DDPAX496	50 lb Stored Pressure BC	160B:C
DDPAX497	50 lb Stored Pressure PK	160B:C
DDPAX488	125 lb Stored Pressure ABC	40A:240B:C
DDPAX489	150 lb Stored Pressure BC	240B:C
DDPAX490	125 lb Stored Pressure PK	320B:C

→ **More STORED PRESSURE WHEELED FIRE EXTINGUISHERS Available - Call for Pricing.**



DDPAX673



DDPAX675

**Amerex's WHEELED HALOTRON 1™ FIRE EXTINGUISHERS** feature the same qualities found in all **Amerex** products and add the convenience of a clean extinguishing agent with a low GWP (Global Warming Potential) and a low ODP (Ozone Depletion Potential). Halotron 1 has a short atmospheric lifetime, and each unit maximizes agent visibility during discharge. There's no thermal shock, no static shock, and no electrical conductivity back to the operator. EPA approved for Class A, B and C hazards. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX673	286 lb	58"	28"	39"
DDPAX674	512 lb	64"	30"	42"
DDPAX675	610 lb	64"	37"	43"

P/N	DESCRIPTION	UL RATING
→ DDPAX673	65 lb Halotron 1	4A:60B:C
→ DDPAX674	150 lb Halotron 1	10A:80B:C
→ DDPAX675	150 lb Halotron 1 w/steel wheels	10A:80B:C

### Amerex's FFFP WHEELED FIRE EXTINGUISHERS

contain a premixed FFFP (film forming fluoroprotein) alcohol resistant foam. Highly effective on Class B fuel fires and a penetrating/wetting agent on fires involving Class A materials. Quality hardware throughout, including the unique agent cylinder, fabricated entirely of stainless steel — no interior coatings are necessary. Meets NFPA requirements for hospital helicopter pad protection. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX630	390 lb	57"	34"	39"

P/N	DESCRIPTION	UL RATING
DDPAX630	33 gal Direct Pressure FFFP	20A:160B



DDPAX630

### Amerex's CLASS D WHEELED FIRE EXTINGUISHERS

are ideal for large combustible metal fires. Well balanced for quick transport on 36" diameter non-sparking, rubber treaded, steel wheels. Both are pressurized with Argon and regulated to a low 125 psi (to avoid disrupting the burning materials). FM approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX680	444 lb	52"	28"	45"
DDPAX681	544 lb	52"	28"	45"

P/N	DESCRIPTION
DDPAX680	150 lb Regulated Pressure Sodium Chloride
DDPAX681	250 lb Regulated Pressure Copper Powder



DDPAX681

### Amerex's CARBON DIOXIDE (CO<sub>2</sub>) WHEELED FIRE EXTINGUISHERS

are easy to operate with a "quick opening" T-handle valve and horn mounted shut-off valve. A logical choice where a Class B:C non-contaminating agent is required and hand portable protection or number of personnel would not be adequate. USCG approved. Call the Sales Department for quantity pricing.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDPAX333	257 lb	47"	23"	48"
DDPAX334	461 lb	47"	23"	48"

P/N	DESCRIPTION	UL RATING
DDPAX333	50 lb CO <sub>2</sub>	20B:C
DDPAX334	100 lb CO <sub>2</sub>	20B:C



DDPAX333



DDPAX334

**NOTE:** All prices quoted are FOB factory. All nitrogen cylinder operated wheeled extinguishers are shipped with the "DRY CHEMICAL" agent in pails. Most wheeled units are available in a stationary configuration. Inquire about special quantity pricing.



## BADGER FIRE EXTINGUISHERS

**Badger's STORED PRESSURE MULTI-PURPOSE FIRE EXTINGUISHERS** are extremely versatile. They will tackle the majority of fire risks found in most commercial, industrial and domestic environments. They are suitable for use on class A, B, and C fires and mount on any surface with the wall hook supplied, or if preferred, can be supplied with optional vehicle bracket.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
22430B	5.4 lb	14 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>2</sub> "	3"	-
22435B	10 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
22486B	10.3 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
23390B	10.4 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
22603B	17 lb	18 <sup>15</sup> / <sub>16</sub> "	7 <sup>3</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
23396B	18 lb	18 <sup>15</sup> / <sub>16</sub> "	7 <sup>3</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
22682B	33 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL
23497B	34 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
→ 22430B	2 <sup>1</sup> / <sub>2</sub> lb w/ Vehicle Bracket	1A:10B:C
→ 22435B	5 lb w/ Wall Hook	3A:40B:C
→ 22486B	5 lb w/ Vehicle Bracket	3A:40B:C
→ 23390B	5 lb Brass Valve w/ Wall Hook	3A:40B:C
→ 22603B	10 lb w/ Wall Hook	4A:80B:C
→ 23396B	10 lb Brass Valve w/ Wall Hook	4A:80B:C
→ 22682B	20 lb w/ Wall Hook	20A:120B:C
→ 23497B	20 lb Brass Valve w/ Wall Hook	20A:120B:C

**Badger's REGULAR DRY CHEMICAL STORED PRESSURE FIRE EXTINGUISHERS** are specifically designed to meet the needs of industrial and commercial premises where there is a flammable liquid risk. They are cost effective to maintain and offer good value and excellent performance. Suitable for use on class B and C fires. They mount on any surface with wall hook, forked hanger or, if preferred, can be supplied with optional vehicle bracket.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	HEAVY-DUTY BRACKET P/N
23471B	5 <sup>1</sup> / <sub>8</sub> lb	14 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>2</sub> "	3"	-
22478B	10 lb	15 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>4</sub> "	5DC
22676B	17 lb	18 <sup>15</sup> / <sub>16</sub> "	7 <sup>3</sup> / <sub>4</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
23482B	33 lb	21 <sup>1</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	15HBL

P/N	DESCRIPTION	UL RATING
→ 23471B	2 <sup>1</sup> / <sub>2</sub> lb Brass Valve w/ Vehicle Bracket	10B:C
→ 22478B	5 <sup>1</sup> / <sub>2</sub> lb w/ Wall Hook	40B:C
→ 22676B	10 lb w/ Wall Hook	60B:C
→ 23482B	20 lb Brass Valve w/ Wall Hook	120B:C



**Badger's HALOTRON 1™ FIRE EXTINGUISHER**, an environmentally acceptable Halon alternative portable extinguisher, is designed to meet any special hazard need where Halon-1211 was specified and used. Halotron 1 is ideal for protecting office computer areas, data storage, telecommunications and high tech clean rooms. Halotron 1 meets EPA approval and is the government-specified clean agent alternative.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
23347B	6 <sup>7</sup> / <sub>8</sub> lb	14 <sup>7</sup> / <sub>8</sub> "	6 <sup>1</sup> / <sub>8</sub> "	3"
23348B	10 <sup>7</sup> / <sub>8</sub> lb	15 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>4</sub> "
23082B	23 lb	16 <sup>3</sup> / <sub>16</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "
23097B	26 <sup>1</sup> / <sub>2</sub> lb	17 <sup>1</sup> / <sub>8</sub> "	8 <sup>3</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "

P/N	DESCRIPTION	UL RATING
→ 23347B	2 <sup>1</sup> / <sub>2</sub> lb Halotron 1	2B:C
→ 23348B	5 lb Halotron 1	5B:C
→ 23082B	11 lb Halotron 1	1A:10B:C
→ 23097B	15 <sup>1</sup> / <sub>2</sub> lb Halotron 1	2A:10B:C

**Badger's CARBON DIOXIDE (CO<sub>2</sub>) FIRE EXTINGUISHERS**

give fast, safe and effective protection for fires involving electrical equipment and flammable liquids. They are generally suited for use indoors, making them ideal for today's office environments. The cylinders are manufactured from lightweight, high grade aluminum. They are highly effective, easy to use and leave no messy residue to clean up.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER	heavy-duty Bracket P/N
21111B	15 lb	17"	8 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>4</sub> "	5HB
21106B	30 lb	19 <sup>3</sup> / <sub>16</sub> "	10 <sup>7</sup> / <sub>8</sub> "	6 <sup>9</sup> / <sub>10</sub> "	15HB
21103B	40 lb	26"	10 <sup>7</sup> / <sub>8</sub> "	6 <sup>9</sup> / <sub>10</sub> "	15HB
21096B	51 lb	26"	12 <sup>1</sup> / <sub>4</sub> "	8"	20HB

P/N	DESCRIPTION	UL RATING
→ 21111B	5 lb Carbon Dioxide	5B:C
→ 21106B	10 lb Carbon Dioxide	10B:C
→ 21103B	15 lb Carbon Dioxide	10B:C
→ 21096B	20 lb Carbon Dioxide	10B:C

**Badger's new UNIVERSAL ULTRA FOAM EXTINGUISHERS**

are effective on class A common combustibles as well as both hydrocarbon and polar solvent types of class B flammable liquids, so they eliminate the application guesswork associated with other foams. The unique synthetic base of Universal Ultra Foam does not have any offensive odors, is non-toxic, environmentally friendly, biodegradable and extremely simple to use and clean up.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
23681B	10 lb	19 <sup>1</sup> / <sub>4</sub> "	9"	7"
23697B	12 lb	24 <sup>1</sup> / <sub>2</sub> "	9"	7"

P/N	DESCRIPTION	UL RATING
→ 23681B	6 Liter Foam	1A:20B
→ 23697B	2 <sup>1</sup> / <sub>2</sub> Gal Foam	1A:30B
→ 23691B	6 Liter Recharge	
→ 23702B	2 <sup>1</sup> / <sub>2</sub> Gal Recharge	



23347B



23082B



21111B



21103B



23681B

NEW



23158B

The fire fighting power and user friendly design of the new **Badger WET CHEMICAL PORTABLE EXTINGUISHERS** make them the ideal choice for commercial restaurant applications. These stored pressure extinguishers have been designed to offer the very best portable fire protection available to supplement pre-engineered restaurant suppression systems.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
23158B	15 lb	19 1/2"	9"	7"
P/N	DESCRIPTION	UL RATING		
→ 23158B	6 Liter Wet Chemical	K		
→ AC100	6 Liter Recharge Jug, Pkg/2			

NEW



16888B

**Badger's HIGH-PRESSURE WATER EXTINGUISHER** is ideal for common combustible materials such as trash, wood, and paper. This non-toxic, ozone-friendly stored pressure extinguisher makes it the perfect choice for apartments, storerooms, schools, offices, dry goods stores, and theaters. **Badger's** pressurized water fire extinguisher performs better, lasts longer, and offers the best value in the extinguisher industry, and it's the number one choice for virtually all hazards where class A-type materials may be present.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
16888B	8 lbs	24.75"	9"	7"
P/N	DESCRIPTION	UL RATING		
→ 16888B	2 1/2 gal Water	2A		
→ 792B	WP-61 Antifreeze Charge			

NEW



DDP466521B

The **Badger BRIGADE CARTRIDGE OPERATED UNITS** are the industry's most effective fire extinguisher of this kind available today! Available in ABC, BC or PK, these units use either carbon dioxide or nitrogen expellent gas and feature deep-drawn, seamless steel (with corrosion resistant cylinders) for maximum performance. These units are ideal for high-hazard areas where fast, effective fire protection is needed.

**Badger's CARBON DIOXIDE (CO<sub>2</sub>) VERSIONS** (For Use Down to -40° F).

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
DDP466521B	25 1/2 lb	18 1/4"	9 1/2"	5 1/10"
DDP466562B	25 1/2 lb	18 1/4"	9 1/2"	5 1/10"
DDP466522B	27 lb	18 1/4"	9 1/2"	5 1/10"
DDP466523B	25 1/2 lb	18 1/4"	9 1/2"	5 1/10"
DDP466563B	25 1/2 lb	18 1/4"	9 1/2"	5 1/10"
DDP466527B	45 1/2 lb	23 3/8"	11 1/4"	6 1/3"
DDP466564B	45 1/2 lb	23 3/8"	11 1/4"	6 1/3"
DDP466528B	47 1/2 lb	23 3/8"	11 1/4"	6 1/3"
DDP466529B	46 1/2 lb	23 3/8"	11 1/4"	6 1/3"
DDP466565B	46 1/2 lb	23 3/8"	11 1/4"	6 1/3"

P/N	DESCRIPTION	UL RATING
→ DDP466521B	10 lb ABC	4A:40B:C
→ DDP466562B	10 lb ABC High Flow	1A:20B:C
→ DDP466522B	10 lb BC	40B:C
→ DDP466523B	10 lb Purple K	60B:C
→ DDP466563B	10 lb Purple K High Flow	20B:C
→ DDP466527B	20 lb ABC	20A:60B:C
→ DDP466564B	20 lb ABC High Flow	2A:40B:C
→ DDP466528B	20 lb BC	60B:C
→ DDP466529B	20 lb Purple K	80B:C
→ DDP466565B	20 lb Purple K High Flow	20B:C

NEW



DDP466527B

## Badger's CARBON DIOXIDE (CO<sub>2</sub>) VERSIONS

(For Use Down to -40° F).



P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
DDP466533B	51 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466566B	51 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466539B	55 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466534B	54 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466567B	54 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "

P/N	DESCRIPTION	UL RATING
→ DDP466533B	30 lb ABC	20A:80B:C
→ DDP466566B	30 lb ABC High Flow	3A:40B:C
→ DDP466539B	30 lb BC	120B:C
→ DDP466534B	30 lb Purple K	120B:C
→ DDP466567B	30 lb Purple K High Flow	40B:C

## Badger's NITROGEN VERSIONS (For Use Down to -65° F).

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	SHELL DIAMETER
DDP466524B	26 <sup>1</sup> / <sub>2</sub> lb	18 <sup>1</sup> / <sub>4</sub> "	9 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>10</sub> "
DDP466525B	28 lb	18 <sup>1</sup> / <sub>4</sub> "	9 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>10</sub> "
DDP466526B	26 <sup>1</sup> / <sub>2</sub> lb	18 <sup>1</sup> / <sub>4</sub> "	9 <sup>1</sup> / <sub>2</sub> "	5 <sup>1</sup> / <sub>10</sub> "
DDP466530B	46 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>3</sub> "
DDP466581B	46 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>3</sub> "
DDP466531B	48 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>3</sub> "
DDP466532B	47 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>3</sub> "
DDP466568B	47 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	11 <sup>1</sup> / <sub>4</sub> "	6 <sup>1</sup> / <sub>3</sub> "
DDP466535B	52 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466582B	52 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466540B	56 lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466536B	55 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "
DDP466583B	55 <sup>1</sup> / <sub>2</sub> lb	23 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>5</sub> "

P/N	DESCRIPTION	UL RATING
→ DDP466524B	10 lb ABC	4A:40B:C
→ DDP466525B	10 lb BC	40B:C
→ DDP466526B	10 lb Purple K	60B:C
→ DDP466530B	20 lb ABC	20A:60B:C
→ DDP466581B	20 lb ABC High Flow	2A:40B:C
→ DDP466531B	20 lb BC	60B:C
→ DDP466532B	20 lb Purple K	80B:C
→ DDP466568B	20 lb Purple K High Flow	20B:C
→ DDP466535B	30 lb ABC	20A:80B:C
→ DDP466582B	30 lb ABC High Flow	3A:40B:C
→ DDP466540B	30 lb BC	120B:C
→ DDP466536B	30 lb Purple K	120B:C
→ DDP466583B	30 lb Purple K High Flow	40B:C

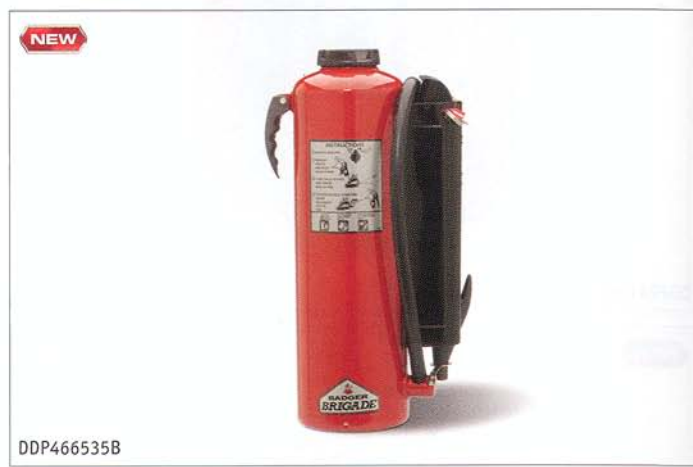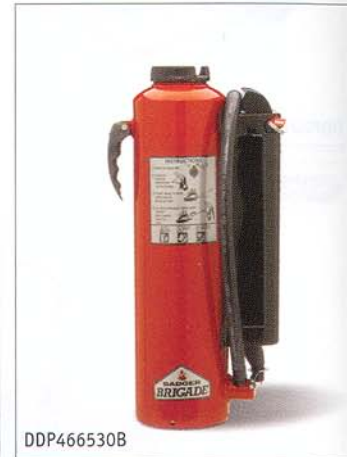

## BADGER'S VEHICLE BRACKETS FOR CARTRIDGE OPERATED EXTINGUISHERS

**VEHICLE BRACKETS** for Badger Brigade cartridge operated models.

P/N	DESCRIPTION
466541B	Badger 10 lb Cartridge Operated Vehicle Bracket
466542B	Badger 20 lb Cartridge Operated Vehicle Bracket
466543B	Badger 30 lb Cartridge Operated Vehicle Bracket





DDP20127B

DDP20653B

When high-hazard fires demand a fast response, one-person response and exceptional performance, **Badger's WHEELED STORED PRESSURE DRY CHEMICAL EXTINGUISHERS** give you the power you need. Long-range discharge gives control over ordinarily out-of-reach fires and allows the operator to keep a safe distance from the fire source and smoke. The Badger 50 lb unit provides especially cost effective, reliable fire protection.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDP20127B	140 lb	46 <sup>1</sup> / <sub>4</sub> "	23"	25"
DDP20175B	140 lb	46 <sup>1</sup> / <sub>4</sub> "	23"	25"
DDP20180B	141 lb	46 <sup>1</sup> / <sub>4</sub> "	23"	25"
DDP20653B	300 lb	58"	28"	40"
DDP20677B	375 lb	58"	28"	40"
DDP20684B	300 lb	58"	28"	40"

P/N	DESCRIPTION	UL RATING
→ DDP20127B	50 lb ABC	30A:160B:C
→ DDP20175B	50 lb BC	160B:C
→ DDP20180B	50 lb Purple K	160B:C
→ DDP20653B	125 lb ABC	40A:240B:C
→ DDP20677B	150 lb BC	240B:C
→ DDP20684B	125 lb Purple K	240B:C



DDP24126B

### Badger's WHEELED REGULATED RELEASE & DIRECT RELEASE DRY CHEMICAL EXTINGUISHERS

are recommended for locations such as chemical or petroleum plants and storage facilities, airports, warehouses, construction sites, equipment depots, and other high-hazard locations where dry chemical is the preferred agent. Highly mobile, these units permit a single operator to extinguish fires that would normally require several operators with large portables.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH	TYPE
DDP19900B	435 lbs	52"	27"	38"	Regulated Pressure
DDP19906B	440 lbs	52"	27"	38"	Regulated Pressure
DDP19915B	415 lbs	52"	27"	38"	Regulated Pressure
DDP24126B	743 lbs	57"	34"	39"	Pressure Transfer
DDP24132B	793 lbs	57"	34"	39"	Pressure Transfer
DDP24129B	743 lbs	57"	34"	39"	Pressure Transfer

P/N	DESCRIPTION	UL RATING
→ DDP19900B	145 lb ABC	40A:240B:C
→ DDP19906B	150 lb BC	240B:C
→ DDP19915B	125 lb Purple K	240B:C
→ DDP24126B	300 lb ABC	40A:320B:C
→ DDP24132B	350 lb BC	320B:C
→ DDP24129B	300 lb Purple K	320B:C



DDP22724B

### Badger's WHEELED CARBON DIOXIDE (CO<sub>2</sub>) EXTINGUISHERS

provide excellent protection for certain flammable liquids and energized electrical equipment. They can be operated by a single person, and the squeeze-grip control valve design allows for ease of use. They are generally reserved for indoor use where wind and drafts will not disperse a discharge pattern. Carbon dioxide is a clean agent and leaves no residue.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDP22724B	271 lb	52"	21.5"	35"
DDP22725B	446 lb	52"	32"	35"

P/N	DESCRIPTION	UL RATING
→ DDP22724B	50 lb Carbon Dioxide	20B:C
→ DDP22725B	100 lb Carbon Dioxide	20B:C

**FIREBOY FIRE EXTINGUISHERS**

**Fireboy FE-241** Manual/Automatic Extinguishing Systems are USCG and FM approved for both industrial and marine use. They're perfect for chemical/flammable storage areas, electrical rooms, film storage rooms and other normally unoccupied areas. **Fireboy's** non-corrosive, non-conductive clean agents virtually eliminate collateral damage.

P/N	GROSS WEIGHT	UNIT HEIGHT	SHELL DIAMETER
DDP25FE241	1.8 lb	8"	3"
DDP50FE241	2.7 lb	12"	3"
DDP75FE241	3.9 lb	15"	3"
DDP100FE241	5.3 lb	15"	3 1/2"
DDP125FE241	6.1 lb	14"	4"
DDP150FE241	11.8 lb	18 1/16"	4"
DDP175FE241	12.7 lb	18 1/16"	4"
DDP200FE241	13.5 lb	15"	5"
DDP225FE241	14.4 lb	15"	5"
DDP250FE241	18.3 lb	12"	7"
DDP275FE241	19.1 lb	12"	7"
DDP300FE241	19.9 lb	12"	7"
DDP325FE241	24 lb	15"	7"
DDP350FE241	24.8 lb	15"	7"
DDP375FE241	25.7 lb	15"	7"
DDP400FE241	26.5 lb	15"	7"
DDP450FE241	29.8 lb	17"	7"
DDP500FE241	31.5 lb	17"	7"
DDP550FE241	39.9 lb	24"	7"
DDP600FE241	41.6 lb	24"	7"
DDP650FE241	43.2 lb	24"	7"
DDP700FE241	44.9 lb	24"	7"
DDP750FE241	46.7 lb	24"	7"
DDP800FE241	53.6 lb	24"	7"
DDP850FE241	55.3 lb	24"	7"
DDP900FE241	57 lb	24"	7"
DDP950FE241	58.7 lb	24"	7"
DDP1000FE241	60.4 lb	24"	7"
DDP1050FE241	62.1 lb	32"	7"
DDP1100FE241	61.5 lb	21"	10"
DDP1150FE241	63.1 lb	21"	10"
DDP1200FE241	64.9 lb	21"	10"
DDP1250FE241	66.5 lb	21"	10"


P/N	DESCRIPTION	MAXIMUM VOL. PROTECTED
→ DDP25FE241	FE-241	25 cu ft
→ DDP50FE241	FE-241	50 cu ft
→ DDP75FE241	FE-241	75 cu ft
→ DDP100FE241	FE-241	100 cu ft
→ DDP125FE241	FE-241	125 cu ft
→ DDP150FE241	FE-241	150 cu ft
→ DDP175FE241	FE-241	175 cu ft
→ DDP200FE241	FE-241	200 cu ft
→ DDP225FE241	FE-241	225 cu ft
→ DDP250FE241	FE-241	250 cu ft
→ DDP275FE241	FE-241	275 cu ft
→ DDP300FE241	FE-241	300 cu ft
→ DDP325FE241	FE-241	325 cu ft
→ DDP350FE241	FE-241	350 cu ft
→ DDP375FE241	FE-241	375 cu ft
→ DDP400FE241	FE-241	400 cu ft
→ DDP450FE241	FE-241	450 cu ft
→ DDP500FE241	FE-241	500 cu ft
→ DDP550FE241	FE-241	550 cu ft
→ DDP600FE241	FE-241	600 cu ft
→ DDP650FE241	FE-241	650 cu ft
→ DDP700FE241	FE-241	700 cu ft
→ DDP750FE241	FE-241	750 cu ft
→ DDP800FE241	FE-241	800 cu ft
→ DDP850FE241	FE-241	850 cu ft
→ DDP900FE241	FE-241	900 cu ft
→ DDP950FE241	FE-241	950 cu ft
→ DDP1000FE241	FE-241	1000 cu ft
→ DDP1050FE241	FE-241	1050 cu ft
→ DDP1100FE241	FE-241	1100 cu ft
→ DDP1150FE241	FE-241	1150 cu ft
→ DDP1200FE241	FE-241	1200 cu ft
→ DDP1250FE241	FE-241	1250 cu ft



DDP25FE241



DDP200FE241

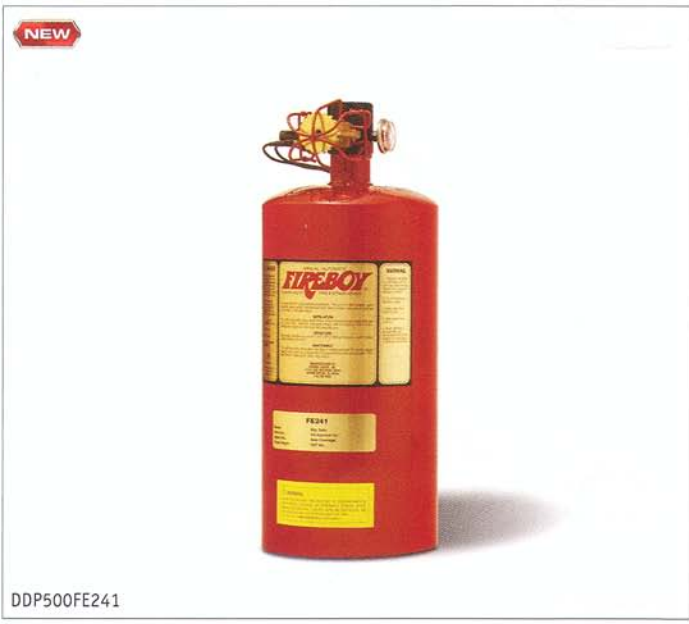

DDP500FE241

NEW



DDP1500FE241

**Fireboy FE-241** Manual/Automatic Extinguishing Systems are USCG and FM approved for both industrial and marine use. They're perfect for chemical/flammable storage areas, electrical rooms, film storage rooms and other normally unoccupied areas. **Fireboy's** non-corrosive, non-conductive clean agents virtually eliminate collateral damage.

P/N	GROSS WEIGHT	UNIT HEIGHT	SHELL DIAMETER
DDP1300FE241	98.2 lb	32"	10"
DDP1350FE241	100.5 lb	32"	10"
DDP1400FE241	102.9 lb	32"	10"
DDP1450FE241	105.3 lb	32"	10"
DDP1500FE241	108 lb	32"	10"

P/N	DESCRIPTION	MAXIMUM VOL. PROTECTED
→ DDP1300FE241	FE-241	1300 cu ft
→ DDP1350FE241	FE-241	1350 cu ft
→ DDP1400FE241	FE-241	1400 cu ft
→ DDP1450FE241	FE-241	1450 cu ft
→ DDP1500FE241	FE-241	1500 cu ft

NEW



DDP25HFC227

**Fireboy HFC-227** Manual/Automatic Extinguishing Systems are USCG and FM approved for both industrial and marine use. Accepted worldwide, HFC-227 is the generic form of FM-200 and is best used in areas that are normally occupied and for most all marine applications. **Fireboy's** non-corrosive, non-conductive clean agents virtually eliminate collateral damage.

P/N	GROSS WEIGHT	UNIT HEIGHT	SHELL DIAMETER
DDP25HFC227	2 lb	8"	3"
DDP50HFC227	3.1 lb	12"	3"
DDP75HFC227	5 lb	15"	3"
DDP100HFC227	6 lb	15"	3 1/2"
DDP125HFC227	9.7 lb	14"	4"
DDP150HFC227	13 lb	18 11/16"	4"
DDP175HFC227	14 lb	18 11/16"	4"
DDP200HFC227	15 lb	15"	5"
DDP225HFC227	19.1 lb	15"	5"
DDP250HFC227	20.1 lb	12"	7"
DDP275HFC227	21.1 lb	12"	7"
DDP300HFC227	25.3 lb	12"	7"
DDP325HFC227	26.3 lb	15"	7"
DDP350HFC227	27.4 lb	15"	7"
DDP375HFC227	28.4 lb	15"	7"
DDP400HFC227	31 lb	15"	7"
DDP450HFC227	33.1 lb	17"	7"

P/N	DESCRIPTION	MAXIMUM VOL. PROTECTED
→ DDP25HFC227	HFC-227	25 cu ft
→ DDP50HFC227	HFC-227	50 cu ft
→ DDP75HFC227	HFC-227	75 cu ft
→ DDP100HFC227	HFC-227	100 cu ft
→ DDP125HFC227	HFC-227	125 cu ft
→ DDP150HFC227	HFC-227	150 cu ft
→ DDP175HFC227	HFC-227	175 cu ft
→ DDP200HFC227	HFC-227	200 cu ft
→ DDP225HFC227	HFC-227	225 cu ft
→ DDP250HFC227	HFC-227	250 cu ft
→ DDP275HFC227	HFC-227	275 cu ft
→ DDP300HFC227	HFC-227	300 cu ft
→ DDP325HFC227	HFC-227	325 cu ft
→ DDP350HFC227	HFC-227	350 cu ft
→ DDP375HFC227	HFC-227	375 cu ft
→ DDP400HFC227	HFC-227	400 cu ft
→ DDP450HFC227	HFC-227	450 cu ft

NEW



DDP200HFC227

**Fireboy HFC-227** Manual/Automatic Extinguishing Systems are USCG and FM approved for both industrial and marine use.

P/N	GROSS WEIGHT	UNIT HEIGHT	SHELL DIAMETER
DDP500HFC227	41.8 lb	17"	7"
DDP550HFC227	43.9 lb	24"	7"
DDP600HFC227	45.9 lb	24"	7"
DDP650HFC227	53.2 lb	24"	7"
DDP700HFC227	55.3 lb	24"	7"
DDP750HFC227	57.3 lb	24"	7"
DDP800HFC227	59.4 lb	24"	7"
DDP850HFC227	61.5 lb	24"	7"
DDP900HFC227	61.5 lb	24"	7"
DDP950HFC227	63.3 lb	24"	7"
DDP1000HFC227	65.3 lb	24"	7"
DDP1050HFC227	67.3 lb	32"	7"
DDP1100HFC227	74.5 lb	21"	10"
DDP1150HFC227	76.5 lb	21"	10"
DDP1200HFC227	78.6 lb	21"	10"
DDP1250HFC227	80.4 lb	21"	10"
DDP1300HFC227	82.7 lb	32"	10"
DDP1350HFC227	84.8 lb	32"	10"
DDP1400HFC227	94.8 lb	32"	10"
DDP1450HFC227	96.9 lb	32"	10"
DDP1500HFC227	98.9 lb	32"	10"

P/N	DESCRIPTION	MAXIMUM VOL. PROTECTED
→ DDP500HFC227	HFC-227	500 cu ft
→ DDP550HFC227	HFC-227	550 cu ft
→ DDP600HFC227	HFC-227	600 cu ft
→ DDP650HFC227	HFC-227	650 cu ft
→ DDP700HFC227	HFC-227	700 cu ft
→ DDP750HFC227	HFC-227	750 cu ft
→ DDP800HFC227	HFC-227	800 cu ft
→ DDP850HFC227	HFC-227	850 cu ft
→ DDP900HFC227	HFC-227	900 cu ft
→ DDP950HFC227	HFC-227	950 cu ft
→ DDP1000HFC227	HFC-227	1000 cu ft
→ DDP1050HFC227	HFC-227	1050 cu ft
→ DDP1100HFC227	HFC-227	1100 cu ft
→ DDP1150HFC227	HFC-227	1150 cu ft
→ DDP1200HFC227	HFC-227	1200 cu ft
→ DDP1250HFC227	HFC-227	1250 cu ft
→ DDP1300HFC227	HFC-227	1300 cu ft
→ DDP1350HFC227	HFC-227	1350 cu ft
→ DDP1400HFC227	HFC-227	1400 cu ft
→ DDP1450HFC227	HFC-227	1450 cu ft
→ DDP1500HFC227	HFC-227	1500 cu ft

**Fireboy FE-241 and HFC-227 ACCESSORIES.**

P/N	DESCRIPTION
→ CMD3MD	Carbon Monoxide Detection for Marine Use Only
→ DDPE42096	Manual Discharge Cable, 6'
→ DDPE42098	Manual Discharge Cable, 8'
→ DDPE420910	Manual Discharge Cable, 10'
→ DDPE420912	Manual Discharge Cable, 12'
→ DDPE420914	Manual Discharge Cable, 14'
→ DDPE420916	Manual Discharge Cable, 16'
→ DDPE420918	Manual Discharge Cable, 18'
→ DDPE420920	Manual Discharge Cable, 20'
→ DDPE420922	Manual Discharge Cable, 22'
→ DDPE420924	Manual Discharge Cable, 24'
→ DDPE420926	Manual Discharge Cable, 26'
→ DDPE420928	Manual Discharge Cable, 28'
→ DDPE420930	Manual Discharge Cable, 30'
→ DDPE5300001	Diesel Engine Shut Down, 12VDC, 3 Circuit
→ DDPE53000012432	Diesel Engine Shut Down, 24/32VDC, 3 Circuit
→ DDPE5500001	Diesel Engine Shut Down, 12VDC, 5 Circuit
→ DDPE55000012432	Diesel Engine Shut Down, 24/32VDC, 5 Circuit
→ DDPE5501501	Diesel Engine Shut Down, w/ GM Engine Time Delay 12VDC, 5 Circuit
→ DDPE55015012432	Diesel Engine Shut Down, w/ GM Engine Time Delay 24/32VDC, 5 Circuit
→ DDPE5800001	Diesel Engine Shut Down, 12VDC, 8 Circuit
→ DDPE58000012432	Diesel Engine Shut Down, 24/32VDC, 8 Circuit
→ DDPE5801501	Diesel Engine Shut Down, w/ GM Engine Time Delay 12VDC, 8 Circuit
→ DDPE58015012432	Diesel Engine Shut Down, w/ GM Engine Time Delay 24/32VDC, 8 Circuit





FYREWATCH FM200

## KIDDE MARINE SYSTEMS

**FYREWATCH FM200** Kidde Automatic Marine Extinguishing Systems are shipped direct from Kidde. FM and USCG approved for marine use only. Call us for technical specifications and information on cable kits and accessories, sold separately.

P/N	SHIP. WEIGHT	UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH
DDP466389	4 lb	14 <sup>5</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>2</sub> "	4 <sup>1</sup> / <sub>2</sub> "
DDP466390	7 lb	15 <sup>7</sup> / <sub>8</sub> "	5 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>4</sub> "
DDP466391	9 lb	19 <sup>1</sup> / <sub>8</sub> "	5 <sup>7</sup> / <sub>8</sub> "	5 <sup>1</sup> / <sub>4</sub> "
DDP466392	18 lb	23"	8 <sup>7</sup> / <sub>8</sub> "	6 <sup>1</sup> / <sub>8</sub> "
DDP466393	25 lb	20"	10 <sup>7</sup> / <sub>8</sub> "	7 <sup>7</sup> / <sub>8</sub> "
DDP466394	32 lb	25 <sup>1</sup> / <sub>4</sub> "	10 <sup>7</sup> / <sub>8</sub> "	7 <sup>7</sup> / <sub>8</sub> "
DDP466395	38 lb	29 <sup>1</sup> / <sub>2</sub> "	10 <sup>7</sup> / <sub>8</sub> "	7 <sup>7</sup> / <sub>8</sub> "
DDP466396	51 lb	39 <sup>1</sup> / <sub>4</sub> "	10 <sup>7</sup> / <sub>8</sub> "	7 <sup>7</sup> / <sub>8</sub> "
DDP466397	62 lb	47 <sup>1</sup> / <sub>2</sub> "	10 <sup>7</sup> / <sub>8</sub> "	7 <sup>7</sup> / <sub>8</sub> "

P/N	DESCRIPTION	COVERAGE	AGENT	CASE	CASE
		PER CU. FT	WEIGHT	PACK	WEIGHT
DDP466389	FW50	50	2 lb	4	16 lb
DDP466390	FW100	100	4 lb	4	28 lb
DDP466391	FW125	125	5 lb	4	36 lb
DDP466392	FW200	200	8 lb	1	18 lb
DDP466393	FW275	275	10 <sup>3</sup> / <sub>4</sub> lb	1	25 lb
DDP466394	FW400	400	15 <sup>3</sup> / <sub>4</sub> lb	1	32 lb
DDP466395	FW500	500	19 <sup>3</sup> / <sub>4</sub> lb	1	38 lb
DDP466396	FW750	750	29 <sup>3</sup> / <sub>4</sub> lb	1	51 lb
DDP466397	FW950	950	37 <sup>3</sup> / <sub>8</sub> lb	1	62 lb