

NIGHTHAWK

**Carbon Monoxide
ALARM**



PPM of CO - Move to Fresh Air
(Lb = Low or No Battery)



TEST-RESET



PEAK LEVEL





914E

SMOKE ALARMS

The **914E IONIZATION SMOKE ALARM** is UL listed with test button, power-on LED and 85 db alarm horn. Body measures 3⁷/₈" with a 4⁷/₈" mounting plate. Comes with a 3-year limited warranty. Battery included.

P/N	DESCRIPTION
914E	9V Battery Operated Ionization Smoke Alarm

The **915 IONIZATION SMOKE ALARM** is UL listed with test button, power-on LED and 85 db alarm horn. Body measures 5". Comes with a 5-year limited warranty. Battery included.

P/N	DESCRIPTION
915	9V Battery Operated Ionization Smoke Alarm



918

The **916LL IONIZATION SMOKE ALARM** features a 10-year lithium battery. Includes test button, power-on LED and 85 db alarm horn. Comes with a 10-year limited warranty. UL listed.

P/N	DESCRIPTION
916LL	9V Battery Operated Smoke Alarm w/ Lithium Battery

The UL listed **918 IONIZATION SMOKE ALARM** with safety light includes test button, power-on LED and 85 db alarm horn. Safety light comes on when alarm sounds. Comes with a 5-year limited warranty. Battery included.

P/N	DESCRIPTION
918	9V Battery Operated Ionization Smoke Alarm w/ Safety Light



1235, 1275

The **1235 IONIZATION SMOKE ALARM** is UL listed, includes test button, power-on LED and 85 db alarm horn. You may interconnect up to 24 units of the same model in series. Comes with a 5-year limited warranty.

P/N	DESCRIPTION
1235	120VAC Ionization Smoke Alarm

The **1275 IONIZATION SMOKE ALARM** is UL listed with test button, power-on LED and 85 db alarm horn. You may interconnect up to 12 units of the same model in series. Comes with a 5-year limited warranty. Battery included.

P/N	DESCRIPTION
1275	120VAC Ionization Smoke Alarm w/ 9V Battery Backup



5919

The **5919 PHOTOELECTRIC SMOKE ALARM** is UL listed with test button, power-on LED and 85 db alarm horn. You may interconnect up to 12 units of the same model in series. Comes with a 5-year limited warranty.

P/N	DESCRIPTION
5919	120VAC Photoelectric Smoke Alarm

COMBINATION SMOKE/CO ALARMS are UL listed with voice identification, accompanied by an 85 db alarm. Voice system states "FIRE! FIRE!" when smoke is detected and "WARNING! CARBON MONOXIDE!" when CO is detected. Test/Reset button allows you to test both smoke and CO sensors. Warning light indicates low battery levels on COSM. NH114 interconnects with up to 12 units for smoke alarms and an additional 6 for CO alarms. Batteries included. **NOTE:** The smoke alarm takes precedence when both smoke and carbon monoxide are detected.

P/N	DESCRIPTION	H x DIA
COSM	Combination Smoke/CO Alarm w/ 3 AA Batteries Compliance - NFPA, HUD, FHA	1 1/2" x 5 3/4"
NH114	120V Interconnectable, Combination Smoke/CO Alarm w/ 9V Battery Backup	1 1/2" x 5 3/4"

The **4010YR IONIZATION SMOKE ALARM** is UL listed with a sealed battery compartment, preventing removal of the lithium battery. Unit includes a test button, silencer button, 85 db alarm horn, 10-year lithium power cell and a 10-year limited warranty.

P/N	DESCRIPTION
4010YR	9V Battery Operated Smoke Alarm w/ Permanent Lithium Battery

Brooks' HEARING IMPAIRED SMOKE ALARM with 9 ft line cord, meets ADA and UL 1971 requirements. This photoelectric unit comes with a full functional test switch. 1-year warranty. (Must be returned to manufacturer for warranty coverage after 30 days!)

P/N	DESCRIPTION
710LC	Hearing Impaired Smoke Alarm w/ 9' Cord

ACCESSORIES

UltraLife® LITHIUM BATTERIES outlast alkaline batteries by as much as 10 to 1, with a capacity of 1200 milliampere-hours. Supplies energy at a constant voltage over a wide range of discharge conditions. Contains no mercury, cadmium, or lead. Operates in temperature extremes (-40° F to 140° F).

P/N	DESCRIPTION
U9VL	UltraLife® Lithium 9V Battery (Recommended replacement battery for smoke and CO alarms)

SMOKE ALARM GUARD for protection against vandalism and theft. Prohibits battery removal that would disable the smoke alarm.

P/N	DESCRIPTION	H x DIA
SDG	Smoke Alarm Guard	3 7/8" x 7 7/8"

SMOKE ALARM TESTER is great for testing both photoelectric and ionization alarms. Non-toxic and environmentally safe. 2 1/2 ozs gives 100+ bursts. For high, hard-to-reach alarms try DDPN30 with DDPN59.

NOTE: Maximum number of extensions is 5 (34 ft).

P/N	DESCRIPTION
SDT2	Smoke Alarm Tester, 2 1/2 oz
TE1490	Tester Adapter w/ 18" Extension
DDPN30	30" Grip & Trigger (Special Order) Use with DDPN59
DDPN59	59" Aerosol Extension (Special Order) Use with DDPN30



COSM



4010YR



710LC



U9VL



SDG



SDT2



TE1490




DDPN30, DDPN59



AB2000

CANNED AIR is non-flammable, non-residual, and non-abrasive, with zero ozone depletion potential. Canned Air is moisture free and delivers up to 96 lb per square inch of pressure. Great for cleaning smoke alarms, panels, and office equipment. Comes with plastic delivery tube for hard-to-reach places. Net weight 10 oz.

P/N	DESCRIPTION
AB2000	Canned Air 2000, 10 oz

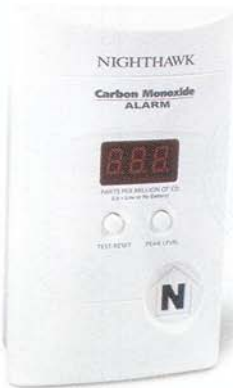

NHDELUXE

CARBON MONOXIDE ALARMS

The UL listed **NIGHTHAWK™ DELUXE** unit is a direct plug, wall mount, and table top unit all in one, with 9V back-up. The Consumer Product Safety Commission recommends only alarms that meet UL Standard 2034, such as **Nighthawk™** Carbon Monoxide Alarms. 5-year limited warranty. Battery included.

P/N	DESCRIPTION
NHDELUXE	120VAC Direct Plug, Carbon Monoxide Alarm w/ 9V Battery Backup



COPB

The UL listed, battery powered **Lifesaver™ CARBON MONOXIDE ALARM**, provides for early warning via a permanent electro-chemical sensor. Unique features include red and green diagnostic lights, peak level (greater than 100 PPM) memory, battery status, and sensor health. 5-year limited warranty.

P/N	DESCRIPTION
COPB	Carbon Monoxide Alarm w/ 3 AA Batteries



COSM

COMBINATION SMOKE/CO ALARMS are UL listed with voice identification, accompanied by an 85 db alarm. Voice system states, "FIRE! FIRE!" when smoke is detected and "WARNING! CARBON MONOXIDE!" when CO is detected. Test/Reset button allows you to test both smoke and CO sensors. Warning light indicates low battery levels on COSM. NH114 interconnects with up to 12 units for smoke alarms and an additional 6 for CO alarms. Batteries included. **NOTE:** The smoke alarm takes precedence when both smoke and carbon monoxide are detected.

P/N	DESCRIPTION	H x DIA
COSM	Combination Smoke/CO Alarm w/ 3 AA Batteries Compliance - NFPA, HUD, FHA	1 1/2" x 5 3/4"
NH114	120V Interconnectable, Combination Smoke/CO Alarm w/ 9V Battery Backup	1 1/2" x 5 3/4"